



Creation 55 Rigid Acoustic

The Reference in LVT



Gerflor[®]

Creation 55 Rigid Acoustic



CEDAR BROWN 0850

228 x 1500



MICHIGAN 0461

178 x 1219



BOSTONIAN OAK 0871

178 x 1219



RUSTIC OAK 0445

178 x 1219



LONG BOARD 0455

178 x 1219 / 228 x 1500



BAITA BLOND 1023

228 x 1500



BOSTONIAN OAK HONEY 0851

178 x 1219



SWISS OAK GOLDEN 0796

178 x 1219 / 228 x 1500



DESIGN SHADE VARIATION



Light



Medium



High

Creation 55 Rigid Acoustic EIR



CHARMING OAK BROWN 1280

178 x 1219




LOUNGE OAK CHESTNUT 1274

228 x 1500



LOUNGE OAK GOLDEN 1271

228 x 1500

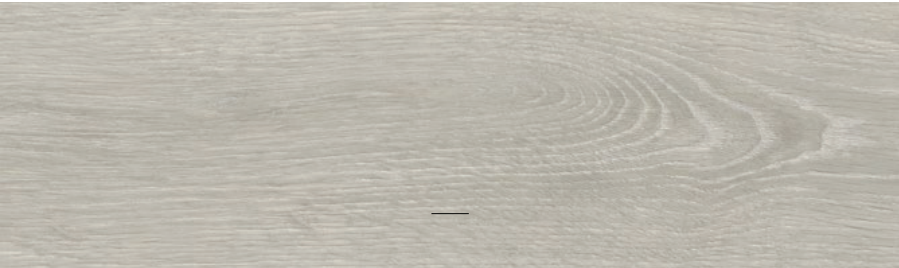

CHARMING OAK GREY 1279

178 x 1219



Lounge oak chestnut

Creation 55 Rigid Acoustic



SUAVE LIGHT 0978

178 x 1219



OXFORD 0061

178 x 1219



MALUA BAY 0448

178 x 1219



RANCH 0456

178 x 1219



SUCRE WHITE 0983

178 x 1219



SWISS OAK PEARL 0846

178 x 1219 / 228 x 1500



WHITE LIME 0584

178 x 1219



Light



Medium



High

Creation 55 Rigid Acoustic



OUD WOOD 1022 228 x 1500



BUFFALO 0457 178 x 1219



SWISS OAK SMOKED 0847 178 x 1219 / 228 x 1500



AMARANTE 0579 178 x 1219



AMADOR 0447 178 x 1219 / 228 x 1500



TWIST 0504 178 x 1219



SWISS OAK CASHMERE 0795 178 x 1219 / 228 x 1500



SWISS OAK BEIGE 0848 178 x 1219 / 228 x 1500

DESIGN SHADE VARIATION



Light



Medium



High


Creation 55 Rigid Acoustic



DURANGO TAUPE 0751
457 x 914



REGGIA IVORY 0861
457 x 914

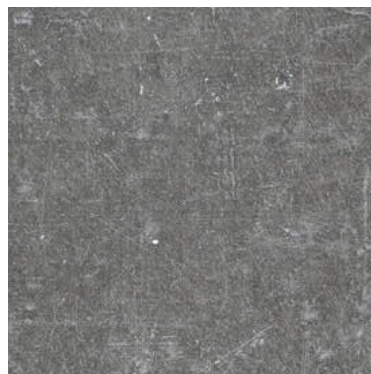

DOCK GREY 0085
457 x 914




BLOOM UNI GREY 0869
457 x 914



BLOOM UNI TAUPE 0868
457 x 914



RIVERSIDE 0436
457 x 914

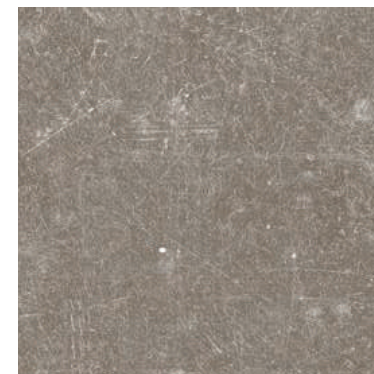

CARMEL 0618
457 x 914



Reggia Ivory

DESIGN SHADE VARIATION  Light  Medium  High

DESIGN SHADE VARIATION  Light  Medium  High

DESCRIPTION						
Total Thickness	EN ISO 24346	mm	6.00			
Thickness of the wearlayer	EN ISO 24340	mm	0.55			
Weight	EN ISO 23997	g/m²	9480			
Size	EN ISO 24342	mm	177x1219	225x1524	457x914	125 x 750
Number of planks /tiles and sqm per box	-	-	8 / 1.73 m²	5 / 1.71 m²	4 / 1.67 m²	16 / 1.5 m²
CLASSIFICATION						
Norm/Product Specification	-	-	EN ISO 10582			
European Classification	EN ISO 10874	class	33 - 42			
Fire Rating	EN 13 501-1	class	Bfl-s1			
Static Electrical Propensity	EN 1815	kV	< 2			
Slip Resistance Wet	DIN 51130	class	R10			
PERFORMANCES						
Wear Resistance	EN 660.2	mm³	< 2.0			
Wear Group	-	group	T			
Type binder content	EN ISO 10582	type	I			
Room Impact	NF S 31074	dB	81			
Impact sound insulation	EN ISO 717-2	dB	19			
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15			
Dimensional stability (average measured value)	-	%	≤ 0.05			
Residual Indentation	EN ISO 24343-1	mm	≤ 0.10			
Castor chair test	ISO 4918	-	OK			
Thermal Conductivity	EN ISO 10456	W/(m.K)	0.25			
Colour Fastness	EN 20 105 - B02	degree	≥ 6			
Surface Treatment	-	-	Protecshield™			
Chemical Products Resistance	EN ISO 26987		OK			
ENVIRONMENT / INDOOR AIR QUALITY						
TVOC after 28 days	ISO 16000-6	µg/ m3	< 10			
CE MARKING						
	EN 14041		  			
						

