



MIPOLAM AFFINITY

gerflor.com




Gerflor[®]
theflooringgroup

MIPOLAM AFFINITY




4425 Amber

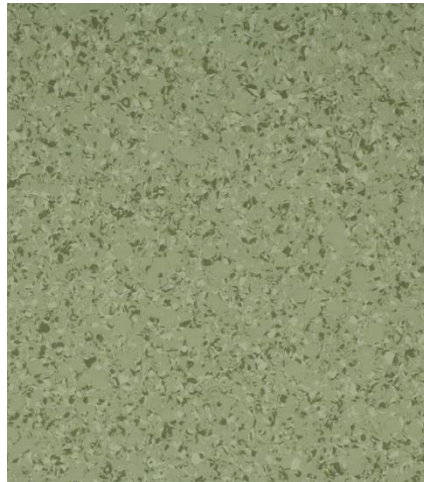

4427 Pine Forest



4447 Light Emerald

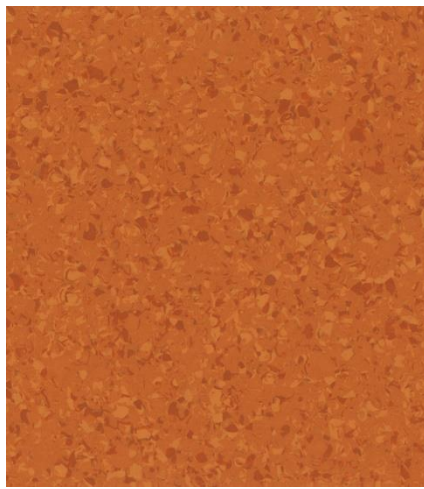


4455 Orange Sunlight




4432 Citrine



4481 Rosaspina

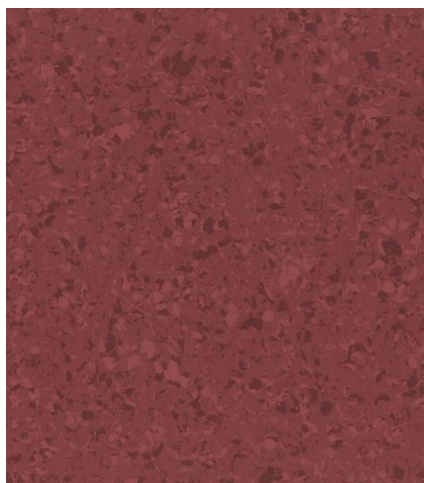

4448 Ruby

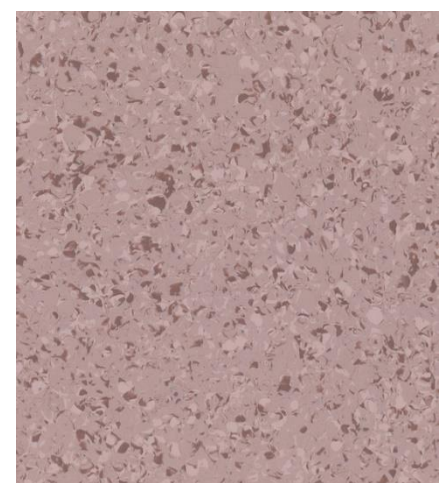


4437 Cashmere Rose

MIPOLAM AFFINITY



4409 Matte Grey

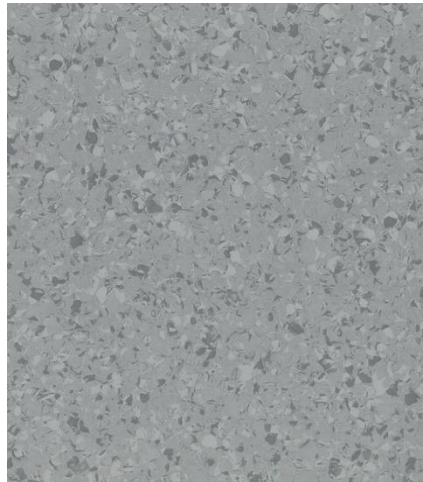

4430 Pearl Grey




4433 Ash Coat



4420 Silver Grey



4460 Black Stone

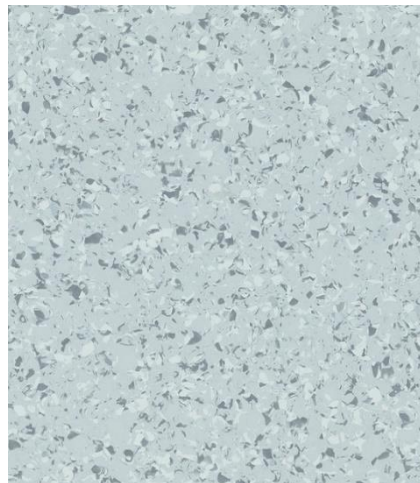

4410 Violet Grey




4441 Light Griege



4463 Griege

MIPOLAM AFFINITY

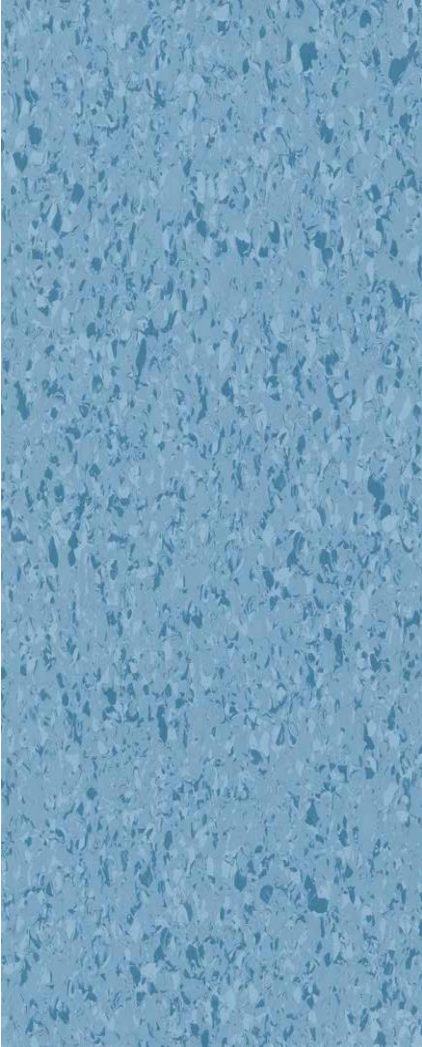


4416 Sapphire




4408 Crystal Ice



4403 Natural Shade

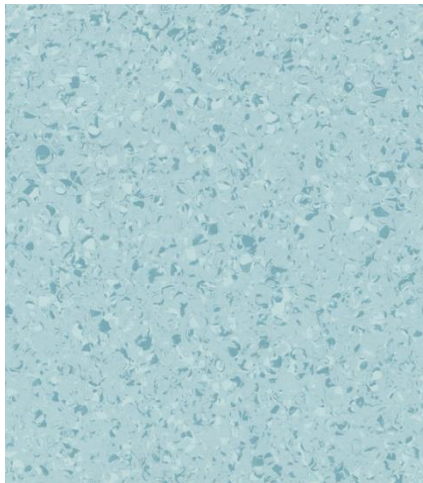


4417 Aquamarine

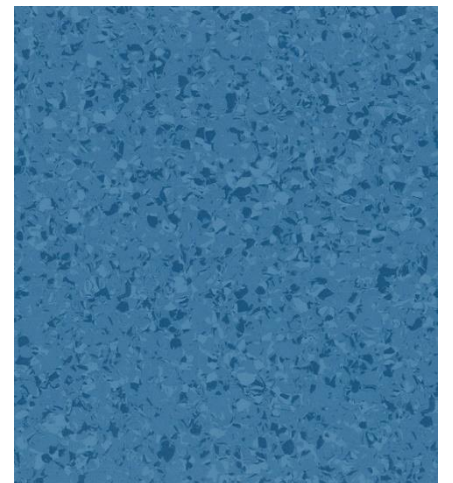

4446 Blue Ocean



4402 Yuki

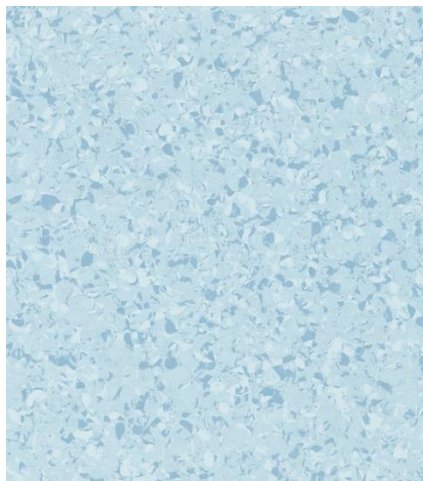

4496 Light Sapphire



4405 Sand Opel

Mipolam Affinity

DESCRIPTION

Total thickness	EN ISO 24346 (EN 428)	mm	2.00
Weight	EN ISO 23997 (EN 430)	g/sq.m	2850
Width/length of sheet	EN ISO 24341 (EN 426)	cm/lm	200/20
Tile size	EN ISO 24342 (EN 427)	mm	608 x 608 ⁽¹⁾
Number of tiles per package	-	-	20

CLASSIFICATION

Norm/product specification	-	-	EN ISO 10581 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl - s1
Static electrical propensity	EN 1815	kV	< 2

PERFORMANCE

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Type binder content	ISO 10581	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	Sheet ≤ 0.40 - Tile ≤ 0.25
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≈ 0.02
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN12524)	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Evercare™
Chemical resistance	EN ISO 26987 (EN 423)	class	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99 % inhibits growth

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg/m ³	< 10
Certification	-	-	Floorscore™

CE marking

CE	EN 14041	-	
		-	

(1) Products available in tiles for a minimum quantity order of 500 sq.m

(2) The implementation of an effective cleaning method is the best defence against infection

Product description & technical data sheet in *Dutch / French, Spanish / Portuguese, Italian, Swedish, Norwegian* on Gerflor websites.

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleaner, or auto scrubber machine with an appropriate pad.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

Further installation and maintenance instructions are available from Gerflor.

MIPOLAM AFFINITY, LESS SPEAKING FOR MORE ACTIONS

 COMPOSITION 100% REACH compliant	 INDOOR AIR QUALITY 100 times below standards (TVOC < 10 µg/m ³ after 28 days)	 RECYCLED CONTENT 25 %	 RECYCLABILITY 100 %	 LCA Eco-designed according to a product specific life cycle analysis	 WELLNESS Walking comfort: B class
--	---	-------------------------------------	-----------------------------------	--	---

